

# ProMax

## Accurate dilution at the push of a button

ProMax features the latest in proportioning technology, reducing flow restriction and maximizing performance even in lower water pressure situations.

It is the latest, most intuitive and cost effective dispensing system available in the market today.

By combining the revolutionary technology of patented hydrodynamics and user friendly, image enhancing features unique to ProMax, SEKO has produced the perfect solution for all institutional and light industrial chemical dilution applications.



ProMax  
Button 1 Product

ProMax  
Button 4 Product

## ProMax - Certifications



ProMax combines state of the art patented technology with innovative user friendly features

- Modularity for maximum versatility
- Space saving design
- Quick, easy, tool free installation
- Pick up and discharge tubing included for fast easy connection to inlet and outlet fittings

Models available to safely and efficiently fill small, medium and large containers with accurately diluted use solutions from chemical concentrates

- Spray Bottle (flow rate 1 gpm)
- Mop Bucket (flow rate 3.5 gpm)
- Floor Scrubber (flow rate 8 gpm)

## Easy to operate

- ProMax allows additional units to be easily added to an existing installation
- Wall bracket mounting eliminates need to open enclosure during installation for tool free mounting
- Accurate dilution rates; select from a full range of supplied metering tips

## Reliability

Robust materials and construction for maximum reliability:

- Magnetic solenoid type activating valve
- Tamper proof housing and activation mechanism
- 4 product selector valve uses a mechanical seal, elastomer free technology for full chemical compatibility
- Auto-activating venturi requires no downstream restriction to create back pressure
- Backflow prevention offers effective protection while minimizing flow restriction

# ProMax

## Accurate Dilution at the Push of a Button

### Low maintenance

Reduced service calls

- Robust housing and valve activating mechanism
- Robust hydraulic with 9 bar (130 psi) static pressure tolerance
- Auto-locking connection
- Auto-activating venturi
- Optional cartridge filter for poor water conditions to reduce water related service calls

### Project your company image

- 95% of the facing available for proprietary graphics using underlays and removable clear faceplates
- No external stick on labels to peel or run from wear or unsightly chemical and water damage
- Customize the facing to identify product and/or establish color coding for employee safety
- Print out small quantities of labels as needed to match your customers' product mix



ProMax  
Slide 4 Product & Button 1 Product

### Pro Max Flex Gap

Pressure:	15 - 130psi
Grey venturi	
Flow rate:	1 gpm
Dilution ratio:	2.7:1 - 556:1
Yellow venturi	
Flow rate:	3.5 gpm
Dilution ratio:	4.9:1 - 1000:1
Blue venturi	
Flow rate:	8 gpm
Dilution ratio:	24.2:1 - 2000:1

### Pro Max Air Gap

Pressure:	15 - 130psi
Grey venturi	
Flow rate:	1 gpm
Dilution ratio:	3.13:1 - 417:1
Yellow venturi	
Flow rate:	4 gpm
Dilution ratio:	7.80:1 - 1429:1

## Features

Available in either 1 or 4 product versions

Revolutionary patented hydrodynamic technology sets new industry standards of performance and reliability

Modular and flexible for maximum versatility for Kitchens to Laundry, Janitorial services to Commercial Cleaning

Efficiently fills small, medium and large containers with accurately diluted ready to use solutions from chemical concentrates

Outstanding space for personalized branding or customized communication without costly printing minimums and set up charges

ProMax C certified by all the leading European water authorities

# ProMax

## Features

**Robust and durable  
PP enclosure**

**Auto-locking connection**

**Cartridge Filter**

The optional head filter, enhances filtration where needed in troublesome water conditions reducing service calls.

**Tamper proof  
housing and activating  
mechanism**




**Magnetic solenoid type  
activating valve**

The large membrane activation ensures perfect operation, up to 9 bar pressure and 158°F



The filtration is independent of the number of units in line.

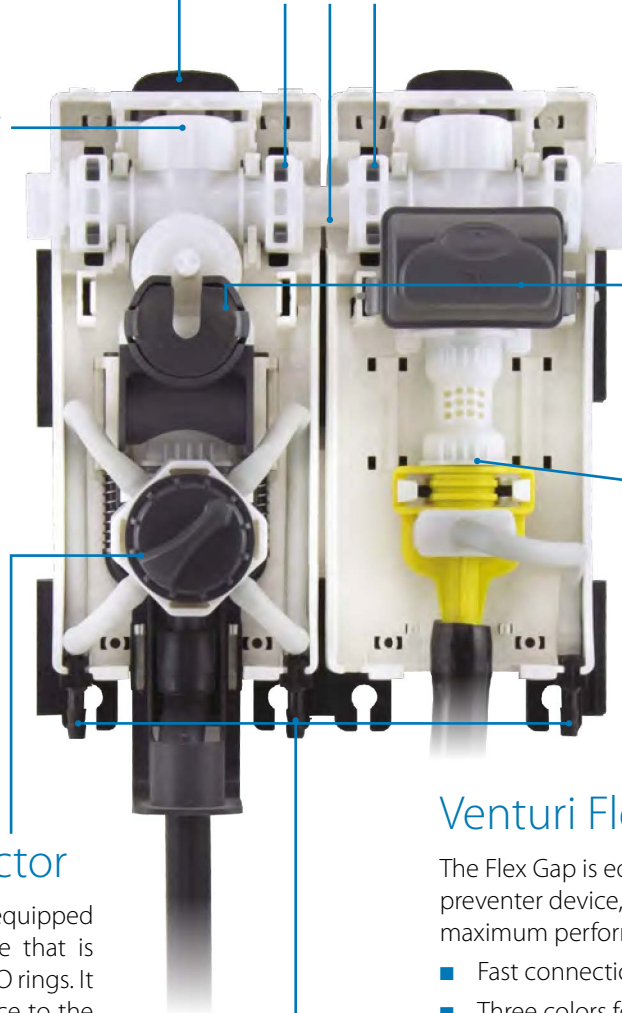

**4 product selector**

The 4 product ProMax is equipped with a new selector valve that is elastomer free and has no O rings. It offers the highest resistance to the widest range of chemicals.

## Venturi Flex Gap Version

The Flex Gap is equipped with a patented backflow preventer device, minimizing restriction and ensuring maximum performance.

- Fast connections
- Three colors for three different flow rates:
  - Grey Low
  - Yellow Medium
  - Blue High
- Same size discharge hose for all models
- Single product units can be easily converted to a 4 product model in the field
- Fully interchangeable parts
- Tool free maintenance

**External tip seat**

The product suction fittings are located outside, where the tips are also inserted.

- Accurate dilution rates
- Select from a full range of supplied metering tips



## Also available in AIR GAP version

- Two colors for two flow rates
  - Grey Low
  - Yellow Medium